

# FSW17P

## Flange Spreading Wedge

A Hydraulic Flange Spreading Wedge with a combined hydraulic cylinder and pump unit.

The FSW17P flange spreading wedge can enter a flange joint access gap as small as 6mm and produce a maximum force of 326kN when used in pairs (as recommended) to push the mating faces of flanges apart. The FSW17P can create a gap up to 81mm between flange faces with the stepped blocks fitted facilitating the replacement of gaskets, seal ring's, or other flange face maintenance and testing.

- 100% Load/Pressure tested and certified
- High durability High Quality low Maintenance design
- Tool weight 8.5Kg
- Max Spreading force 163kN (326kN when used in pairs)
- Spreading distance 6mm to 81mm when used with stepped blocks
- Robust Moulded Case for easy transportation and storage




Engineered Energy Equipment

Product Sales | Product Rental | Bespoke Solutions

# FSW17P

Flange Spreading Wedge

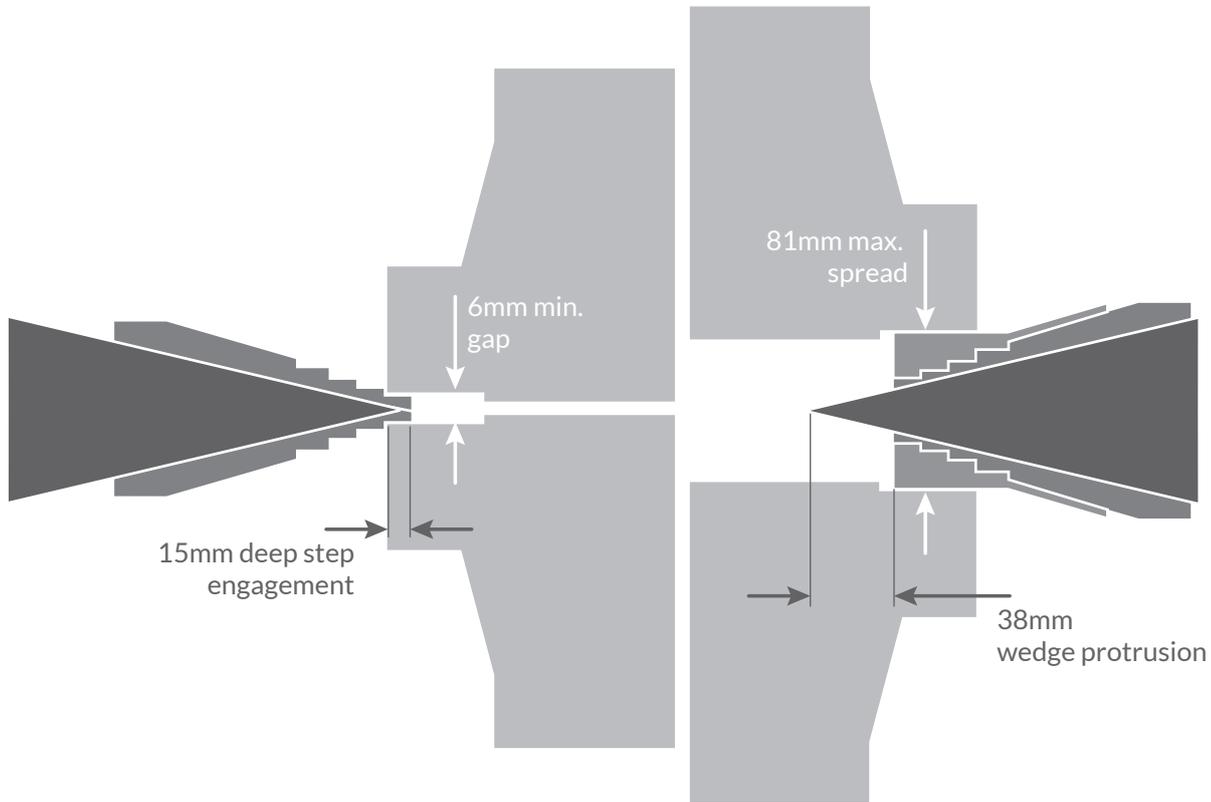

**Kit weight:** 13Kg

**Kit Dims.:** 580mm x 340mm x 180mm

**Tool Weight:** 8.5Kg

**Tool Dims.:** 76mm x 155mm x 440mm

**Product ordering code:** FSW17P

## Kit Content

- 1 x FSW17P Tool with combined hydraulic cylinder and pump unit
- 1 x Pump Actuating Handle
- 1 x Safety Block
- 1 x Safety Lanyard
- 2x Stepped Blocks with securing screws and allen key
- 1 x Instruction Manual
- 1 x Robust moulded carry case



## Engineered Energy Equipment

Product Sales | Product Rental | Bespoke Solutions

[www.renquip.com](http://www.renquip.com)

Unit 1 Dunnottar House, Howe Moss Drive, Dyce, Aberdeen, AB21 0FN  
+44(0) 1224001861 | [info@renquip.com](mailto:info@renquip.com)